



Oil Bubbler/Trap Combo

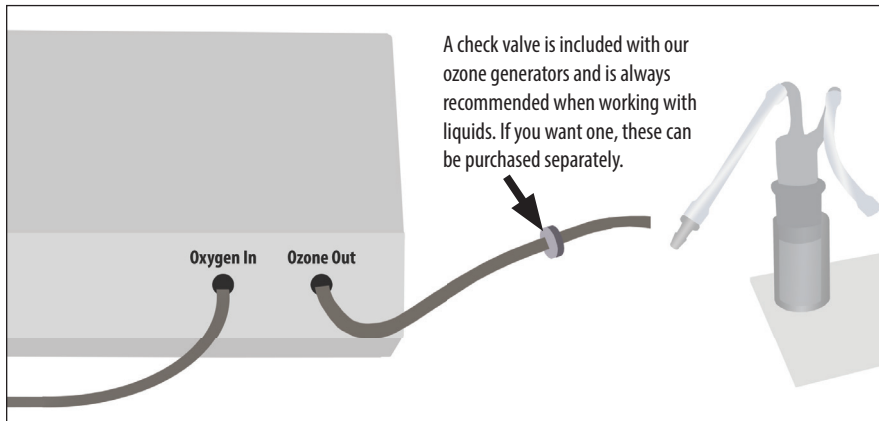


First place the jars into the stand. The jar with the shorter straw goes into the left hand side and the jar with the longer stem goes in the right hand side. Remove the top of the right hand jar and fill it part way with oil and replace the top.

Connect tubing with check valve from your ozone generator to the left hand straw of the oil trap. This is the straw that goes down into the jar.

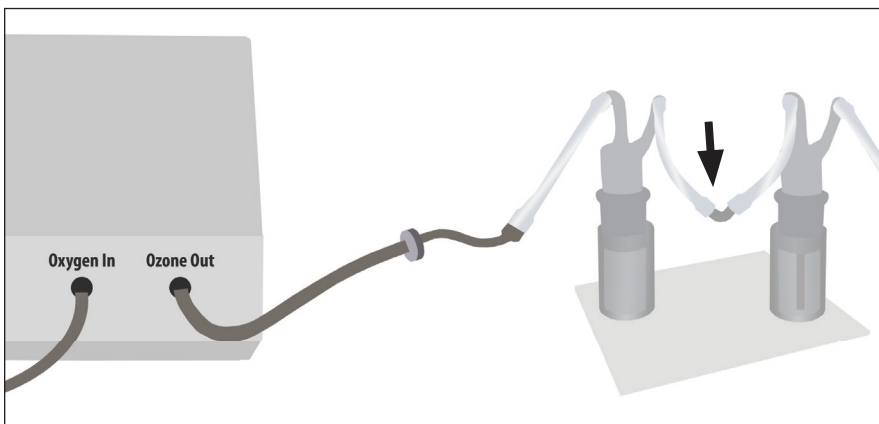

Connect the inner straws using the included elbow joint (shown below).

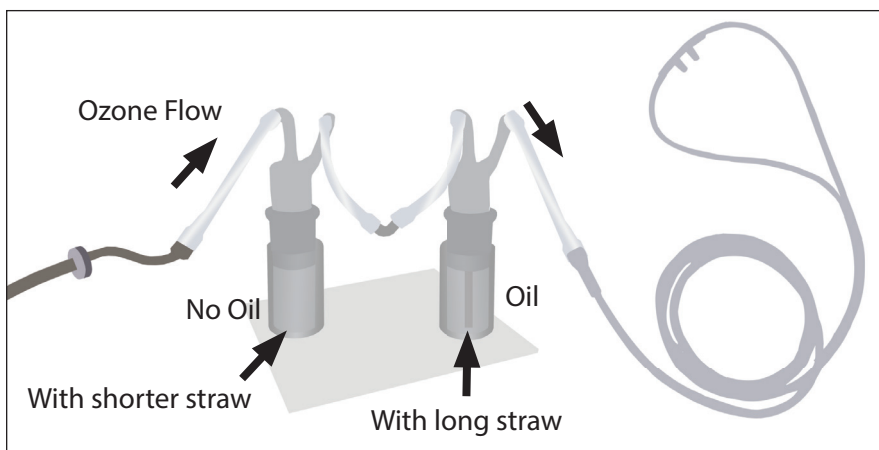

Connect the nasal cannula to the oil bubbler.